

**HIGH PERFORMANCE
TILING AND FLOORING PRODUCTS**

TOP MARKS ON ALL FLOORS

Apply the following products directly to ARDEX DPM 1 C



**ARDEX DPM 1 C
and ARDITEX RS PLUS***

**ARDEX DPM 1 C
and ARDITEX**



**ARDEX DPM 1 C
and ARDITEX NA**

We will be in contact shortly to see if we can be of any further assistance, but if you can't wait until then, please call our Customer Service Department on 01440 714939 or visit **ARDEX online: www.ardex.co.uk**

*Note: When applying ARDITEX RS PLUS on top of ARDEX DPM 1 C, this must be applied within 48 hours of the final cured coat of ARDEX DPM 1 C.

ARDEX DPM 1 C


Now the best performer on even more floors

KEY FEATURES:

- Suppresses residual constructional moisture in all concrete slabs and cement/sand screeds
- Apply ARDITEX, ARDITEX NA or ARDITEX RS PLUS directly to ARDEX DPM 1 C without priming
- Guarantees the early laying of all floorcoverings with the appropriate ARDEX smoothing compound and flooring adhesive
- Use a thinner application for better coverage with hygrometer readings of up to 85% RH
- Easy to apply and fast curing
- Can be used in conjunction with ARDEX Resin Systems
- Available in the new 6kg format as well as the existing 10kg and 25kg units



For the perfect professional finish every time!

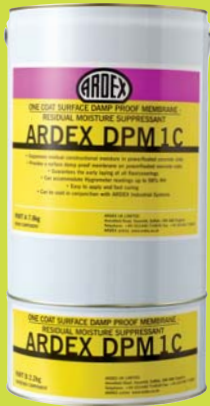

ARDEX DPM 1 C

One Coat Surface Damp Proof Membrane

- Residual Moisture Suppressant

ARDEX DPM 1 C is a one coat solvent free, low viscosity, two component epoxy resin, supplied in pre-gauged units of 6kg, 10kg and 25kg packs. After hardening the ARDEX DPM 1 C produces a membrane which can accommodate hygrometer readings up to 98% RH with high inherent and bond strength. ARDEX DPM 1 C has excellent resistance to water, grease, oil, aqueous salt solution and dilute mineral and organic acids.

SIZE (pack):

Available in 6kg and 10kg two component tin or 25kg pre-gauged plastic container.

COVERAGE:

2.5m²/kg at 250 microns

1.8m²/kg at 350 microns